


This diagram shows an exploded view of a mechanical assembly. The components are numbered as follows: 1 (main base plate), 2 (top plate), 3 (left support), 4 (right support), 5 (central shaft), 6 (left bracket), 7 (top bracket), 8 (right bracket), 9 (right support base), 10 (central shaft), 11 (left bracket), 12 (left support base), 13 (left support base), 14 (left support base), 15 (left support base), 16 (left support base), 17 (left support base).

A circular red sign with a white background, featuring a black silhouette of a lit cigarette with a flame, crossed out by a red diagonal line. This is a standard international symbol for 'No Smoking'.



						3RD ANGLE PROJECTION	A	DO NOT SCALE DRAWING	1:32	Approximate Weight = 517.52 lbs
						UNLESS OTHERWISE SPEC. DIMS. IN INCHES	MATL SPECS: SEE ABOVE			
						STD. TOLERANCES X.X ±.060 X.XX ±.030 X.XXX ±.010 FRAC.DIM. ±1/32" Deg. ±.5°	DESCRIPTION: Kelderman 4-Link (Rear)			
							PROJECT: 2003-2009 GM 4500-5500 Chassis Cab 2x4 (Rear) - Round 116			
							Axle			
							PART NUMBER: KLM-16680			
REV	ECN	CHANGE DESCRIPTION	CHANGE BY	DATE			DESIGN BY:	DATE: 12/20/2021	NOTICE: THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF KELDERMAN MFG. NO USE OR COPIES MAY BE MADE WITHOUT WRITTEN PERMISSION FROM KELDERMAN	

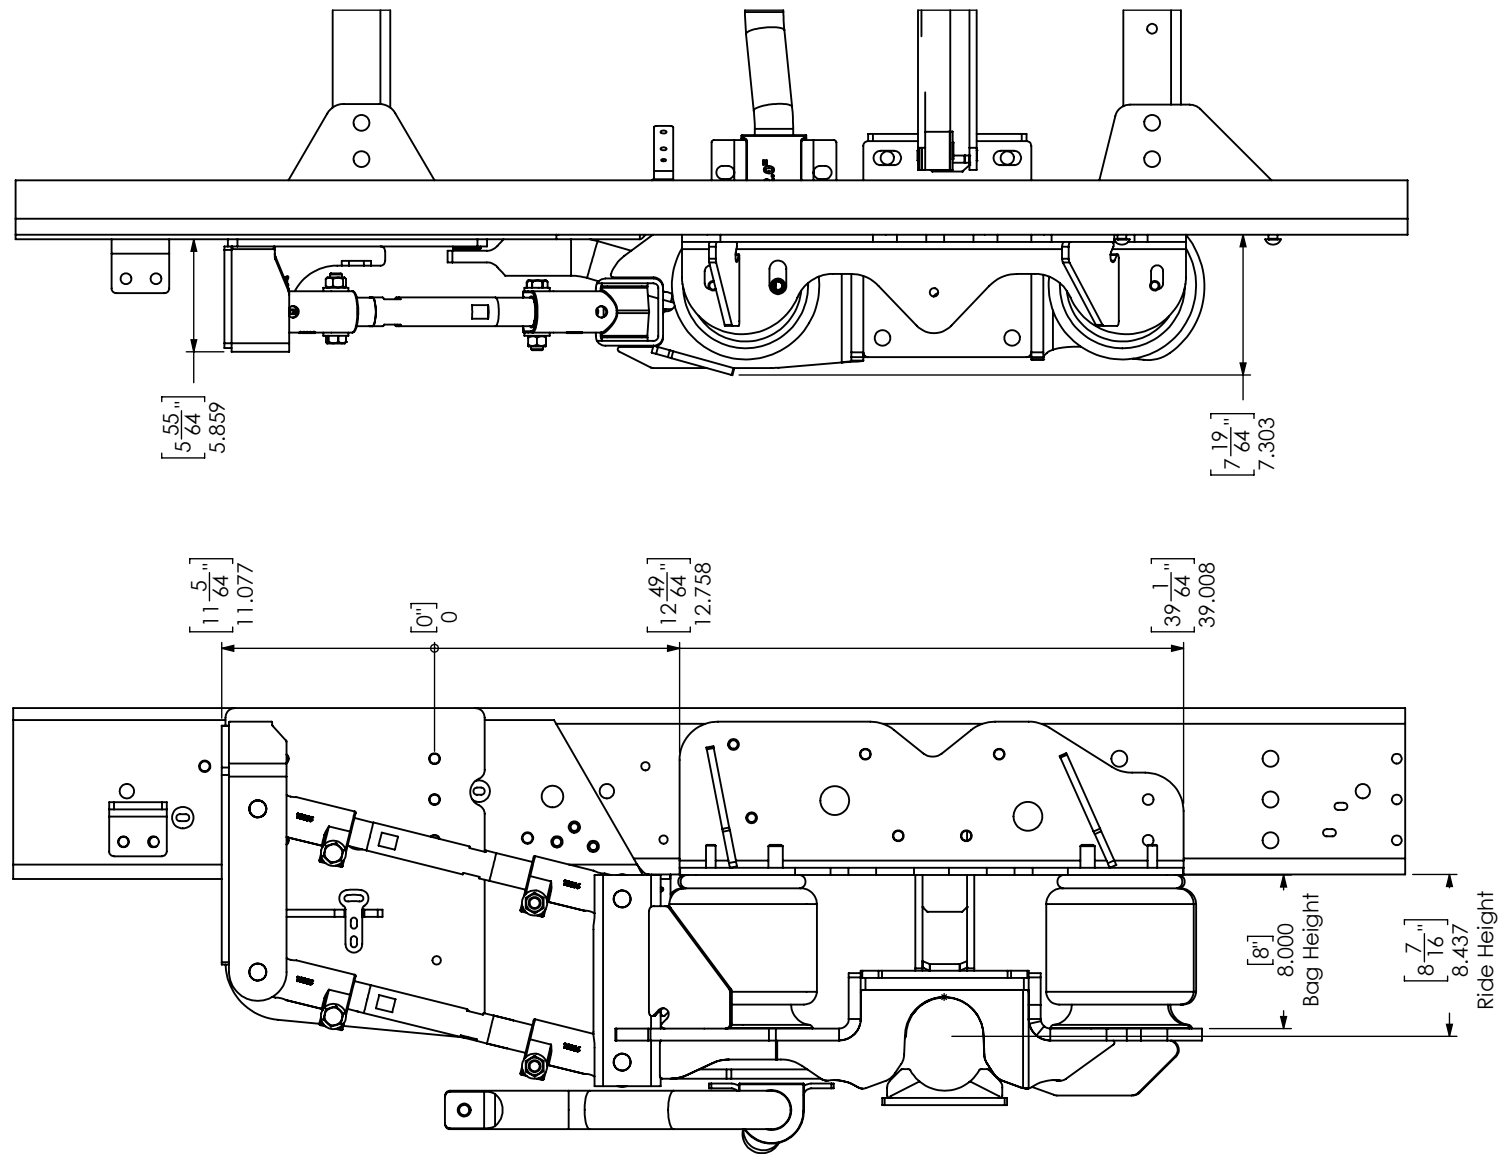

